Rollashield®
PREMIUM ROLLER SHUTTERS by ozROLL

CURVED SERIES
AR400, AR401, AR402

RESIDENTIAL R CURVED SERIES

FEATURES & BENEFITS

- Insulation
- Added security
- Wide range of colours
- Minimum roll up size
- Style choices
- Reduced greenhouse emissions
- Protection from the elements
- Light control
- Sound dampening

TECHNICAL SPECIFICATIONS

Weight (per m²)	4kg
Maximum Curtain Width	3.6m
Maximum Area (m²)	7.7
Gauge of Aluminium	0.32mm
Profile Slat Height	40mm
Profile Slat Thickness	9mm
Standard Guide Dimensions	53mm
Standard Bottom Bar Dimensions	50mm
Standard Axle	50mm circular

The Rollashield Residential Curved Series profiles have been designed specifically to suit the domestic roller shutter market in Australia but are also ideal with many commercial applications. The slat is roll formed in our Adelaide manufacturing facility to the highest of world standards using German built roll forming machines which are the most advanced of their type in the world.
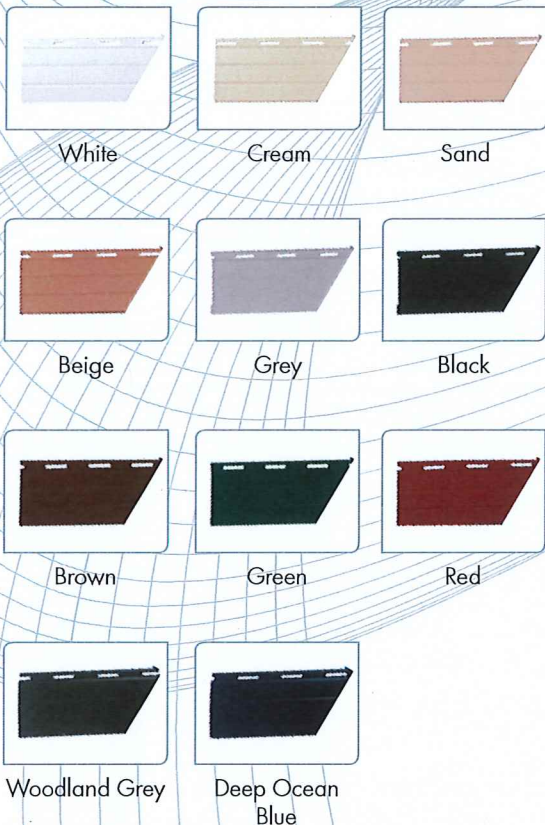
The Rollashield Residential Curved Series slat is a double walled cavity with PU foam injected during the roll forming process. This process provides economical strength and insulation qualities while maintaining exceptional working performance of the slat. The curved shape of the slat provides optimal lateral strength and minimal roll sizes, offering a much smaller head box size.

The Rollashield curved series is available in three different styles, the 400 with profile lines on the convex side and a smooth finish on the concave, the 401 with a smooth finish on both sides and the 402 with profile lines on both sides.

Ozroll's slat profiles can reduce private heating and cooling costs by 40%

Based on tests using National Housing Energy Rating Software

BOX COLOUR OPTIONS

WHITE   CREAM   SAND   BROWN   BLACK   DEEP OCEAN BLUE   WOODLAND GREY

ROLLER SHUTTER COLOUR OPTIONS

White   Cream   Sand

Beige   Grey   Black

Brown   Green   Red

Woodland Grey   Deep Ocean Blue

Please note:
Colours displayed are a guide only and have been matched as closely as possible. Due to the nature of the printing process, some degree of colour variation may occur. We recommend that you use production line prepared samples for final colour selection or approval.

CONTROL OPTIONS

MANUAL

Strap   Winder   Spring Assist

MOTORISED

ODS with E-Port   E-Trans   SOMFY 240V with Inis Uno

SOMFY 240V with Key Switch   SOMFY 240V RTS with Transmitter   SOMFY 240V with CSI override

BOXING OPTIONS

SQUARE BOXING (SQ45)

Sizes Available	Maximum Overall Height
150mm	1300mm
165mm	1700mm
180mm	2135mm
205mm	3000mm
230mm	4000mm
250mm	5000mm

ROUND BOXING (RD360)

Sizes Available	Maximum Overall Height
140mm	1140mm
160mm	1650mm
180mm	2000mm
200mm	2800mm